
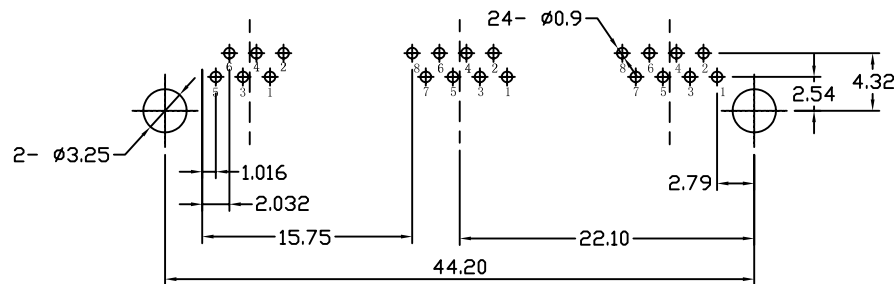
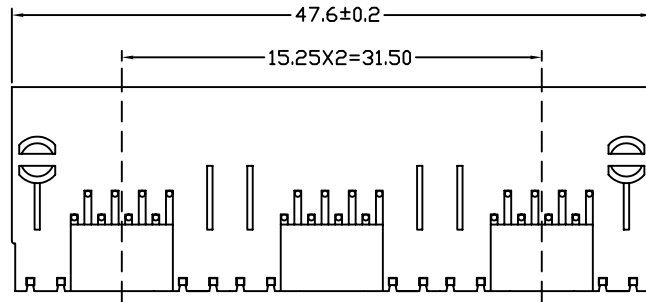
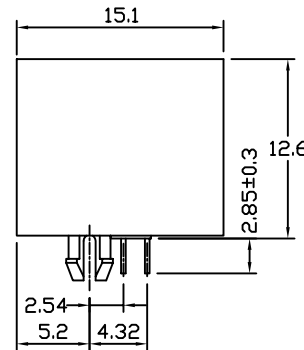


# Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2010/12/15	

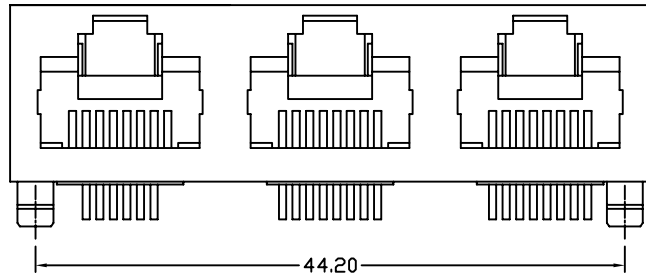

SUGGESTED PCB LAYOUT(TOP VIEW)

- NOTES:
- MATERIAL:
1. HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
  2. CONTACT MATERIAL :PHOSPHOR BRONZE  $\varnothing$ 0.46mm.
  3. PLATING :GOLD PLATING OVER NICKEL.
  4. Plastic color : Black
- ELECTRICAL:
1. VOLTAGE RATING :125VAC RMS.
  2. CURRENT RATING :1.5AMP.
  3. CONTACT RESISTANCE :30 MILLIOHMS MAX.
  4. INSULATION RESISTANCE :500MEGOHMS MIN @ 500V DC.
  5. DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.
- MECHANICAL:
1. DURRABILITY :750 CYCLES MIN.
  2. PCB RETENTION PRE-SOLDER:1LB MIN.
- GOLD PLATING:
- |            |                          |       |                          |      |                          |      |                          |
|------------|--------------------------|-------|--------------------------|------|--------------------------|------|--------------------------|
| GOLD FLASH | <input type="checkbox"/> | 1.5U" | <input type="checkbox"/> | 3U"  | <input type="checkbox"/> | 6U"  | <input type="checkbox"/> |
|            | <input type="checkbox"/> | 15U"  | <input type="checkbox"/> | 30U" | <input type="checkbox"/> | 50U" | <input type="checkbox"/> |
- ENVIRONMENTAL:
1. STORAGE : -40°C TO +85°C.
  2. OPERATION : -40°C TO +85°C.



X:X	±0.25	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.10	CHKD:	TITLE: RJ11+RJ45 1X3 connector	
X:XXX	±0.05	DR: James	PART NO. : LPJE843NNL-2	
ANGLES	±1°	UNIT: mm		
	SCALE: 2/1	SHEET: 1/1	REV: A	DWG NO. : LP10121522