
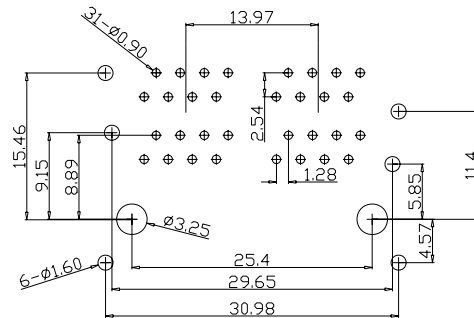

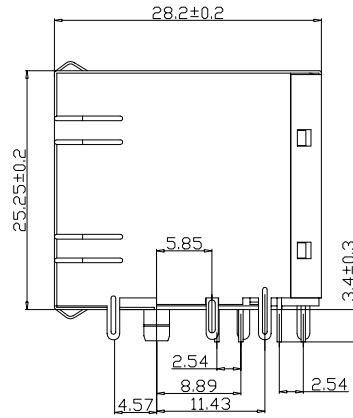


# Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2015/04/16	

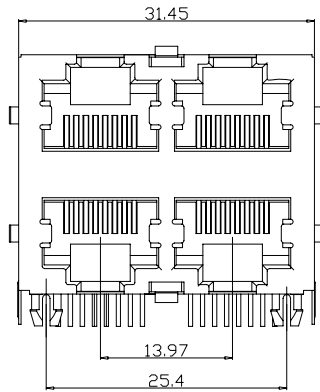

PC Board Layout

## NOTES:

### Electrical:

1. Voltage rating : 125 VAC RMS
2. Current Rating : 1.5 AMP
3. Contact resistance : 50 mΩ Max
4. Insulation resistance : 500 MΩ Min @500V DC
5. Dielectric strength : 1000 VAC RMS 60Hz, 1MIN.

### MECHANICAL:

1. Housing & Insert Material : PBT UL94V-0.
2. Contact Material : Phospor bronze T=0.35mm
3. Shield : 0.20-0.25mm Thickness Brass With tin Plated
4. Operating Life : 750 Cycles Min.

### ENVIRONMENTAL:

1. Storage : -40°C ~ +85°C
2. Operation : 0°C ~ +70°C.
3. Wave solder temperature : 265°C 5 Sec MAX
4. UL Certification : File Number E484635.



X:X	±0.25	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.20	CHKD:	TITLE: RJ45 2*2 Connector	
X:XXX	±0.05	DR: <b>James</b>	PART NO.: <b>LPJE932CNL</b>	
ANGLES	±1°	UNIT: mm	DWG NO.: <b>LP15041616</b>	
SCALE: 2/1		SHEET: 1/1		REV: A