


RoHS Compliant

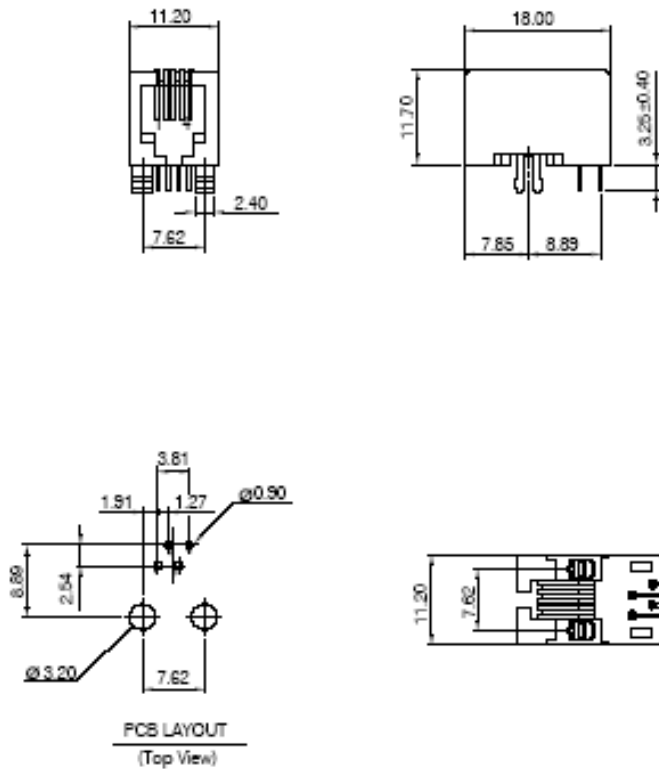

NOTES:

MATERIAL:

- 1. HOUSING MATERIAL :PBT,PA66,PA46(UL 94V-0)
- 2. CONTACT MATERIAL :ROUND PIN-0.46mm DIAMETER PHOSPHOR BRONZE, GOLD PLATING OVER NICKEL

ELECTRICAL/PHYSICAL:

- 1. VOLTAGE RATING :125 VAC RMS
- 2. CURRENT RATING :1.5 AMP
- 3. CONTACT RESISTANCE :30 MILLIOHMS MAX2
- 4. INSULATION RESISTANCE :500 MEGOHMS MIN @500V DC
- 5. DIELECTRIC WITHSTANDING RIGISTANCE :1000V AC RMS 60Hz 1MIN
- 6. DURABILITY :750 CYCLES MIN
- 7. TEMPERATURE :-40 ° C/+85° C

	NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. Nina	DATE MAY-06-12	LINK-PP INT'L TECHNOLOGY CO.,LIMITED 连普国际科技有限公司 http://www.link-pp.com
SIDE ENTRY PCB JACK	THIRD ANGLE PROJECTION	LINEAR MM	.00±0.01 .000±0.005 .0000±0.002	.00±0.25 .000±0.13 .0000±0.05	CKD	MAY-06-12	
DWG. NO. LPJE0003MNL	MM	ANGLE+0° 30'	RADIL	+0.45 -0.15	APPD	MAY-06-12	